


STAINLESS STEEL

RHS

Rectangular Hollow Sections



RHS RECTANGULAR HOLLOW SECTIONS

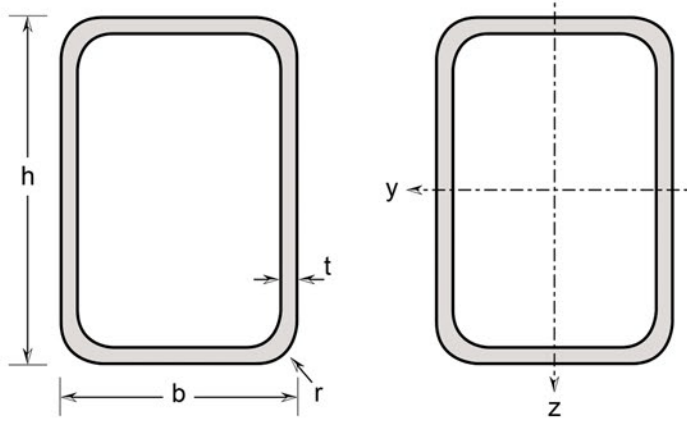

STAINLESS STEEL

Rectangular Hollow Sections Stainless steel


Cold formed and welded acc. to EN 10219-2; grade accord. to EN 10088. Surface condition: external weld bead removed, brushed / blasted and pickled



General Properties							Structural Properties									
Designation		Dimensions					Axis y-y				Axis z-z					
	G kg/m	h mm	b mm	t mm	r mm	A mm ² x10 ²	I _y mm ⁴ x10 ⁴	W _{ely} mm ³ x10 ³	W _{ply} mm ³ x10 ³	i _y mm x10	I _z mm ⁴ x10 ⁴	W _{elz} mm ³ x10 ³	W _{plz} mm ³ x10 ³	i _z mm x10	I _v mm ⁴ x10 ⁴	W _v mm ³ x10 ³
60x40x3	4.33	60	40	3	6	5.41	27.39	9.13	11.21	2.20	14.31	7.16	8.39	1.59	28.39	9.46
60x40x4	5.56	60	40	4	8	6.95	34.50	11.50	14.37	2.17	17.80	8.90	10.69	1.56	35.34	11.78
70x50x3	5.29	70	50	3	6	6.61	46.80	13.37	16.19	2.62	27.49	10.99	12.77	2.00	52.19	14.91
70x50x4	6.84	70	50	4	8	8.55	59.50	17.00	20.89	2.58	34.64	13.86	16.41	1.97	65.84	18.81
70x50x5	8.29	70	50	5	10	10.36	70.92	20.26	25.25	2.54	40.92	16.37	19.75	1.93	77.78	22.22
80x40x3	5.29	80	40	3	6	6.61	55.85	13.96	17.45	2.86	18.43	9.21	10.61	1.64	42.72	10.68
80x40x4	6.84	80	40	4	8	8.55	71.13	17.78	22.53	2.82	23.01	11.50	13.57	1.60	53.47	13.37
80x40x5	8.29	80	40	5	10	10.36	84.92	21.23	27.25	2.78	26.92	13.46	16.25	1.56	62.64	15.66
80x50x3	5.77	80	50	3	6	7.21	64.75	16.19	19.76	2.95	30.80	12.32	14.18	2.03	63.37	15.84
80x50x4	7.48	80	50	4	8	9.35	82.70	20.67	25.57	2.91	38.88	15.55	18.25	2.00	80.14	20.04
80x50x5	9.09	80	50	5	10	11.36	99.00	24.75	31.00	2.87	46.00	18.40	22.00	1.96	94.92	23.73
80x60x3	6.25	80	60	3	6	7.81	73.65	18.41	22.07	3.03	46.90	15.63	18.05	2.42	86.25	21.56
80x60x4	8.12	80	60	4	8	10.15	94.26	23.56	28.61	2.99	59.64	19.88	23.33	2.38	109.78	27.44
80x60x5	9.89	80	60	5	10	12.36	113.08	28.27	34.75	2.95	71.08	23.69	28.25	2.34	130.89	32.72

Other custom sizes are available upon request

RHS RECTANGULAR HOLLOW SECTIONS

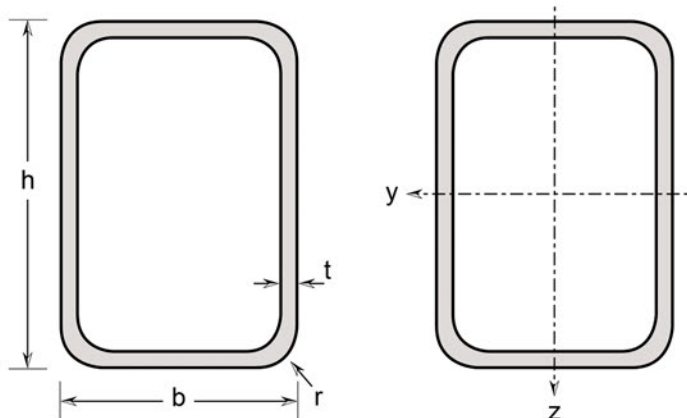

STAINLESS STEEL

Rectangular Hollow Sections Stainless steel


Cold formed and welded acc. to EN 10219-2; grade accord. to EN 10088. Surface condition: external weld bead removed, brushed / blasted and pickled



General Properties							Structural Properties									
Designation		Dimensions					Axis y-y				Axis z-z					
	G kg/m	h mm	b mm	t mm	r mm	A mm ² x10 ²	I _y mm ⁴ x10 ⁴	W _{ely} mm ³ x10 ³	W _{ply} mm ³ x10 ³	i _y mm x10	I _z mm ⁴ x10 ⁴	W _{elz} mm ³ x10 ³	W _{plz} mm ³ x10 ³	i _z mm x10	I _v mm ⁴ x10 ⁴	W _v mm ³ x10 ³
80x60x6	11.54	80	60	6	12	14.43	130.23	32.56	40.51	2.91	81.33	27.11	32.83	2.30	149.70	37.43
100x40x3	6.25	100	40	3	6	7.81	98.00	19.60	24.89	3.49	22.55	11.27	12.83	1.67	57.68	11.54
100x40x4	8.12	100	40	4	8	10.15	125.68	25.14	32.29	3.45	28.21	14.11	16.45	1.63	72.39	14.48
100x40x5	9.89	100	40	5	10	12.36	151.08	30.22	39.25	3.41	33.08	16.54	19.75	1.60	85.04	17.01
100x50x3	6.73	100	50	3	6	8.41	112.12	22.42	27.80	3.60	37.44	14.98	17.00	2.08	86.60	17.32
100x50x4	8.76	100	50	4	8	10.95	144.13	28.83	36.13	3.56	47.37	18.95	21.93	2.04	109.87	21.97
100x50x5	10.69	100	50	5	10	13.36	173.67	34.73	44.00	3.52	56.17	22.47	26.50	2.00	130.54	26.11
100x50x6	12.50	100	50	6	12	15.63	200.87	40.17	51.43	3.48	63.93	25.57	30.73	1.96	148.75	29.75
100x60x3	7.21	100	60	3	6	9.01	126.24	25.25	30.71	3.70	56.65	18.88	21.47	2.48	119.10	23.82
100x60x4	9.40	100	60	4	8	11.75	162.57	32.51	39.97	3.66	72.20	24.07	27.81	2.44	152.11	30.42
100x60x5	11.49	100	60	5	10	14.36	196.25	39.25	48.75	3.62	86.25	28.75	33.75	2.40	182.00	36.40
100x60x6	13.46	100	60	6	12	16.83	227.41	45.48	57.07	3.58	98.90	32.97	39.31	2.36	208.91	41.78
100x80x3	8.17	100	80	3	6	10.21	154.47	30.89	36.53	3.85	109.24	27.31	31.31	3.23	192.37	38.47
100x80x4	10.68	100	80	4	8	13.35	199.45	39.89	47.65	3.81	140.51	35.13	40.77	3.20	247.59	49.52

Other custom sizes are available upon request

RHS RECTANGULAR HOLLOW SECTIONS

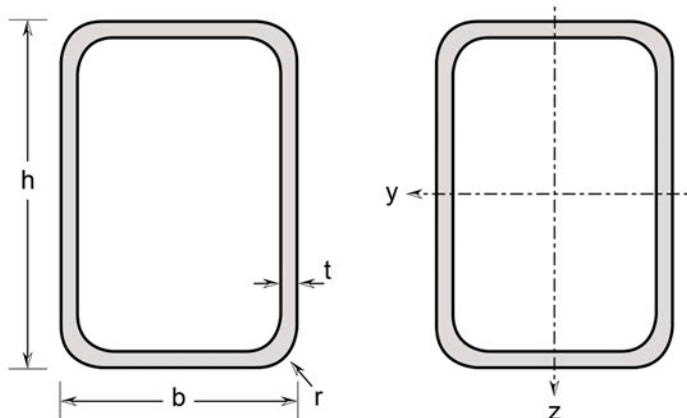

STAINLESS STEEL

Rectangular Hollow Sections Stainless steel


Cold formed and welded acc. to EN 10219-2; grade accord. to EN 10088. Surface condition: external weld bead removed, brushed / blasted and pickled



General Properties							Structural Properties									
Designation		Dimensions					Axis y-y				Axis z-z					
	G kg/m	h mm	b mm	t mm	r mm	A mm ² x10 ²	I _y mm ⁴ x10 ⁴	W _{ely} mm ³ x10 ³	W _{ply} mm ³ x10 ³	i _y mm x10	I _z mm ⁴ x10 ⁴	W _{elz} mm ³ x10 ³	W _{plz} mm ³ x10 ³	i _z mm x10	I _v mm ⁴ x10 ⁴	W _v mm ³ x10 ³
100x80x5	13.09	100	80	5	10	16.36	241.42	48.28	58.25	3.77	169.42	42.35	49.75	3.16	298.62	59.72
100x80x6	15.38	100	80	6	12	19.23	280.50	56.10	68.35	3.73	196.08	49.02	58.27	3.12	345.61	69.12
120x40x3	7.21	120	40	3	6	9.01	156.23	26.04	33.53	4.11	26.66	13.33	15.05	1.70	73.01	12.17
120x40x4	9.40	120	40	4	8	11.75	201.35	33.56	43.65	4.07	33.42	16.71	19.33	1.66	91.78	15.30
120x60x3	8.17	120	60	3	6	10.21	197.31	32.88	40.55	4.35	66.41	22.14	24.89	2.52	153.36	25.56
120x60x4	10.68	120	60	4	8	13.35	255.20	42.53	52.93	4.31	84.77	28.26	32.29	2.48	196.27	32.71
120x60x5	13.09	120	60	5	10	16.36	309.42	51.57	64.75	4.27	101.42	33.81	39.25	2.44	235.33	39.22
120x60x6	15.38	120	60	6	12	19.23	360.12	60.02	76.03	4.23	116.47	38.82	45.79	2.40	270.69	45.11
120x80x3	9.13	120	80	3	6	11.41	238.38	39.73	47.57	4.53	127.04	31.76	35.93	3.30	251.02	41.84
120x80x4	11.96	120	80	4	8	14.95	309.04	51.51	62.21	4.49	163.64	40.91	46.85	3.26	323.84	53.97
120x80x5	14.69	120	80	5	10	18.36	375.58	62.60	76.25	4.45	197.58	49.40	57.25	3.22	391.53	65.25
120x80x6	17.30	120	80	6	12	21.63	438.16	73.03	89.71	4.41	229.01	57.25	67.15	3.19	454.25	75.71
120x100x3	10.09	120	100	3	6	12.61	279.46	46.58	54.59	4.67	210.95	42.19	48.17	4.05	361.12	60.19
120x100x4	13.24	120	100	4	8	16.55	362.89	60.48	71.49	4.63	273.22	54.64	63.01	4.01	467.96	77.99
120x100x5	16.29	120	100	5	10	20.36	441.75	73.63	87.75	4.59	331.75	66.35	77.25	3.97	568.36	94.73

Other custom sizes are available upon request

RHS RECTANGULAR HOLLOW SECTIONS

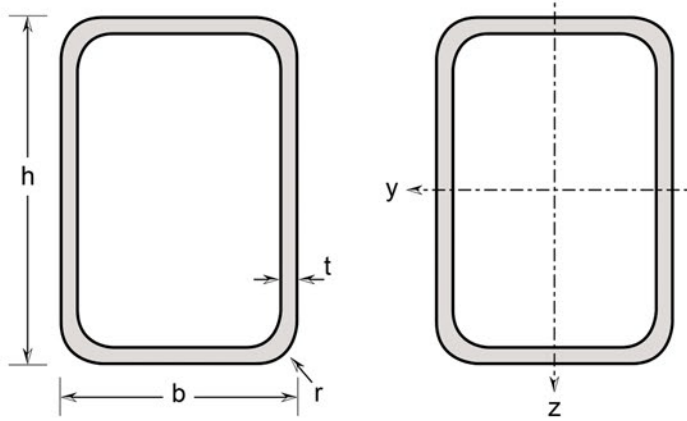

STAINLESS STEEL

Rectangular Hollow Sections Stainless steel


Cold formed and welded acc. to EN 10219-2; grade accord. to EN 10088. Surface condition: external weld bead removed, brushed / blasted and pickled



General Properties							Structural Properties									
Designation		Dimensions					Axis y-y				Axis z-z					
	G kg/m	h mm	b mm	t mm	r mm	A mm ² x10 ²	I _y mm ⁴ x10 ⁴	W _{ely} mm ³ x10 ³	W _{ply} mm ³ x10 ³	i _y mm x10	I _z mm ⁴ x10 ⁴	W _{elz} mm ³ x10 ³	W _{plz} mm ³ x10 ³	i _z mm x10	I _v mm ⁴ x10 ⁴	W _v mm ³ x10 ³
120x100x6	19.22	120	100	6	12	24.03	516.21	86.04	103.39	4.55	386.68	77.34	90.91	3.94	662.50	110.42
140x60x3	9.13	140	60	3	6	11.41	289.25	41.32	51.59	4.98	76.17	25.39	28.31	2.56	188.60	26.94
140x60x4	11.96	140	60	4	8	14.95	375.35	53.62	67.49	4.94	97.33	32.44	36.77	2.52	241.68	34.53
140x60x5	14.69	140	60	5	10	18.36	456.58	65.23	82.75	4.90	116.58	38.86	44.75	2.48	290.16	41.45
140x60x6	17.30	140	60	6	12	21.63	533.14	76.16	97.39	4.86	134.04	44.68	52.27	2.44	334.21	47.74
140x70x3	9.61	140	70	3	6	12.01	317.41	45.34	55.70	5.09	107.44	30.70	34.28	2.96	247.81	35.40
140x70x4	12.60	140	70	4	8	15.75	412.35	58.91	72.93	5.05	138.01	39.43	44.65	2.92	319.08	45.58
140x70x5	15.49	140	70	5	10	19.36	502.17	71.74	89.50	5.01	166.17	47.48	54.50	2.88	385.00	55.00
140x70x6	18.26	140	70	6	12	22.83	587.04	83.86	105.43	4.97	192.05	54.87	63.85	2.84	445.74	63.68
140x80x3	10.09	140	80	3	6	12.61	345.57	49.37	59.81	5.19	144.83	36.21	40.55	3.36	312.00	44.57
140x80x4	13.24	140	80	4	8	16.55	449.35	64.19	78.37	5.15	186.76	46.69	52.93	3.32	403.14	57.59
140x80x5	16.29	140	80	5	10	20.36	547.75	78.25	96.25	5.11	225.75	56.44	64.75	3.28	488.17	69.74
140x80x6	19.22	140	80	6	12	24.03	640.95	91.56	113.47	5.07	261.94	65.48	76.03	3.24	567.27	81.04
140x100x4	14.52	140	100	4	8	18.15	523.36	74.77	89.25	5.31	310.11	62.02	70.69	4.09	587.79	83.97

Other custom sizes are available upon request

RHS RECTANGULAR HOLLOW SECTIONS

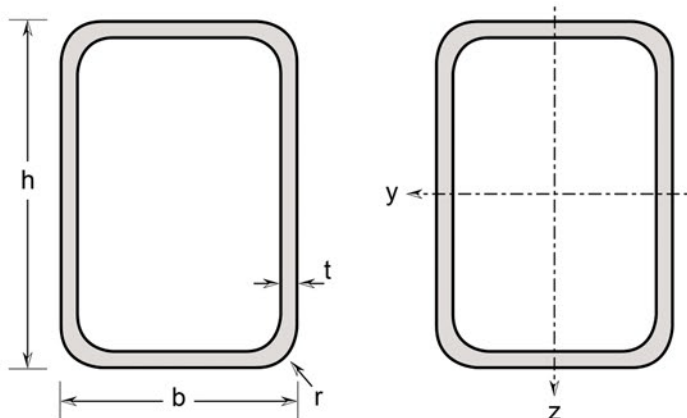

STAINLESS STEEL

Rectangular Hollow Sections Stainless steel


Cold formed and welded acc. to EN 10219-2; grade accord. to EN 10088. Surface condition: external weld bead removed, brushed / blasted and pickled



General Properties							Structural Properties									
Designation		Dimensions					Axis y-y				Axis z-z					
	G kg/m	h mm	b mm	t mm	r mm	A mm ² x10 ²	I _y mm ⁴ x10 ⁴	W _{ely} mm ³ x10 ³	W _{ply} mm ³ x10 ³	i _y mm x10	I _z mm ⁴ x10 ⁴	W _{elz} mm ³ x10 ³	W _{plz} mm ³ x10 ³	i _z mm x10	I _v mm ⁴ x10 ⁴	W _v mm ³ x10 ³
140x100x5	17.89	140	100	5	10	22.36	638.92	91.27	109.75	5.27	376.92	75.38	86.75	4.05	715.13	102.16
140x100x6	21.14	140	100	6	12	26.43	748.76	106.97	129.55	5.23	439.76	87.95	102.19	4.01	835.05	119.29
140x100x8	26.91	140	100	8	20	33.64	952.03	136.00	167.10	5.15	554.21	110.84	131.26	3.93	1053.41	150.49
150x50x3	9.13	150	50	3	6	11.41	311.39	41.52	53.15	5.17	54.03	21.61	24.05	2.15	147.63	19.68
150x50x4	11.96	150	50	4	8	14.95	404.10	53.88	69.53	5.13	68.58	27.43	31.13	2.11	187.94	25.06
150x50x5	14.69	150	50	5	10	18.36	491.58	65.54	85.25	5.09	81.58	32.63	37.75	2.07	224.08	29.88
150x50x6	17.30	150	50	6	12	21.63	574.03	76.54	100.33	5.04	93.15	37.26	43.93	2.03	256.24	34.17
150x80x4	13.88	150	80	4	8	17.35	532.03	70.94	87.05	5.47	198.32	49.58	55.97	3.34	443.68	59.16
150x80x5	17.09	150	80	5	10	21.36	649.33	86.58	107.00	5.43	239.83	59.96	68.50	3.30	537.57	71.68
150x80x6	20.18	150	80	6	12	25.23	760.76	101.43	126.25	5.39	278.40	69.60	80.47	3.26	625.05	83.34
150x100x3	11.53	150	100	3	6	14.41	473.48	63.13	75.20	5.69	253.30	50.66	56.90	4.16	499.96	66.66
150x100x4	15.16	150	100	4	8	18.95	617.31	82.31	98.73	5.65	328.55	65.71	74.53	4.12	649.42	86.59
150x100x5	18.69	150	100	5	10	23.36	754.50	100.60	121.50	5.61	399.50	79.90	91.50	4.08	790.63	105.42
150x100x6	22.10	150	100	6	12	27.63	885.25	118.03	143.53	5.57	466.31	93.26	107.83	4.04	923.81	123.18
150x100x8	28.19	150	100	8	20	35.24	1128.23	150.43	185.42	5.49	588.15	117.63	138.62	3.96	1166.96	155.59

Other custom sizes are available upon request

RHS RECTANGULAR HOLLOW SECTIONS

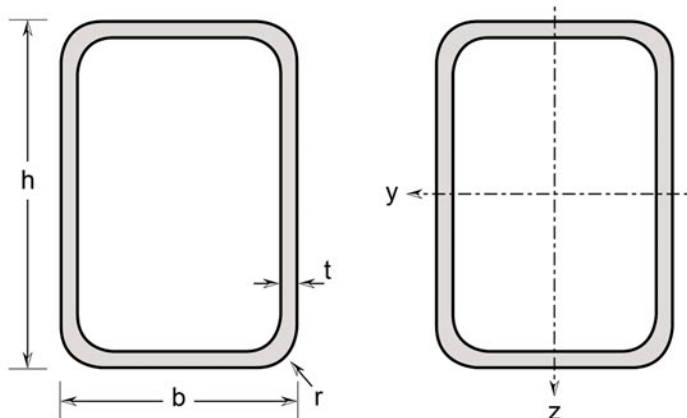

STAINLESS STEEL

Rectangular Hollow Sections Stainless steel


Cold formed and welded acc. to EN 10219-2; grade accord. to EN 10088. Surface condition: external weld bead removed, brushed / blasted and pickled



General Properties							Structural Properties									
Designation		Dimensions					Axis y-y				Axis z-z					
	G kg/m	h mm	b mm	t mm	r mm	A mm ² x10 ²	I _y mm ⁴ x10 ⁴	W _{ely} mm ³ x10 ³	W _{ply} mm ³ x10 ³	i _y mm x10	I _z mm ⁴ x10 ⁴	W _{elz} mm ³ x10 ³	W _{plz} mm ³ x10 ³	i _z mm x10	I _v mm ⁴ x10 ⁴	W _v mm ³ x10 ³
150x100x10	34.06	150	100	10	25	42.57	1347.83	179.71	224.50	5.41	695.33	139.07	167.00	3.89	1380.52	184.07
180x80x4	15.80	180	80	4	8	19.75	834.93	92.77	115.49	6.44	233.01	58.25	65.09	3.40	567.99	63.11
180x80x5	19.49	180	80	5	10	24.36	1022.08	113.56	142.25	6.39	282.08	70.52	79.75	3.36	689.06	76.56
180x80x6	23.06	180	80	6	12	28.83	1201.08	133.45	168.19	6.35	327.80	81.95	93.79	3.32	802.22	89.14
180x100x4	17.08	180	100	4	8	21.35	958.86	106.54	129.57	6.64	383.88	76.78	86.05	4.20	839.63	93.29
180x100x5	21.09	180	100	5	10	26.36	1175.25	130.58	159.75	6.60	467.25	93.45	105.75	4.16	1023.67	113.74
180x100x6	24.98	180	100	6	12	31.23	1382.80	153.64	189.07	6.56	545.94	109.19	124.75	4.12	1197.85	133.09
180x100x8	32.03	180	100	8	20	40.04	1772.34	196.93	245.18	6.48	689.97	137.99	160.70	4.04	1517.57	168.62
200x80x4	17.08	200	80	4	8	21.35	1086.60	108.66	136.45	7.07	256.14	64.03	71.17	3.43	652.62	65.26
200x80x5	21.09	200	80	5	10	26.36	1332.25	133.23	168.25	7.02	310.25	77.56	87.25	3.39	792.19	79.22
200x80x6	24.98	200	80	6	12	31.23	1568.02	156.80	199.15	6.98	360.72	90.18	102.67	3.35	922.81	92.28
200x100x3	13.93	200	100	3	6	17.41	947.25	94.72	115.55	7.33	323.89	64.78	71.45	4.28	745.21	74.52
200x100x4	18.36	200	100	4	8	22.95	1240.29	124.03	152.13	7.29	420.77	84.15	93.73	4.24	969.98	97.00
200x100x5	22.69	200	100	5	10	28.36	1522.42	152.24	187.75	7.25	512.42	102.48	115.25	4.20	1183.36	118.34

Other custom sizes are available upon request

RHS RECTANGULAR HOLLOW SECTIONS

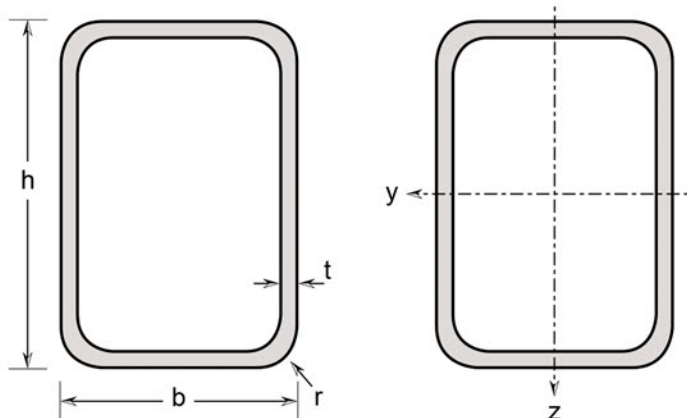

STAINLESS STEEL

Rectangular Hollow Sections Stainless steel


Cold formed and welded acc. to EN 10219-2; grade accord. to EN 10088. Surface condition: external weld bead removed, brushed / blasted and pickled



General Properties							Structural Properties									
Designation		Dimensions					Axis y-y				Axis z-z					
	G kg/m	h mm	b mm	t mm	r mm	A mm ² x10 ²	I _y mm ⁴ x10 ⁴	W _{ely} mm ³ x10 ³	W _{ply} mm ³ x10 ³	i _y mm x10	I _z mm ⁴ x10 ⁴	W _{elz} mm ³ x10 ³	W _{plz} mm ³ x10 ³	i _z mm x10	I _v mm ⁴ x10 ⁴	W _v mm ³ x10 ³
200x100x6	26.90	200	100	6	12	33.63	1793.91	179.39	222.43	7.20	599.03	119.81	136.03	4.16	1385.63	138.56
200x100x8	34.59	200	100	8	20	43.24	2306.01	230.60	289.02	7.12	757.85	151.57	175.42	4.08	1757.84	175.78
200x100x10	42.06	200	100	10	25	52.57	2778.67	277.87	352.00	7.04	898.67	179.73	212.00	4.01	2088.64	208.86
200x150x5	26.69	200	150	5	10	33.36	1997.83	199.78	236.50	7.67	1280.33	170.71	194.00	6.14	2351.40	235.14
200x150x6	31.70	200	150	6	12	39.63	2358.63	235.86	280.63	7.63	1507.69	201.02	229.93	6.10	2770.72	277.07
200x150x8	40.99	200	150	8	20	51.24	3043.72	304.37	365.82	7.55	1935.64	258.09	299.02	6.02	3560.84	356.08
200x150x10	50.06	200	150	10	25	62.57	3682.00	368.20	447.00	7.47	2329.50	310.60	364.50	5.94	4288.24	428.82
200x150x12	57.65	200	150	12	36	72.06	4275.64	427.56	524.26	7.39	2691.12	358.82	426.46	5.86	4955.27	495.53
250x100x3	16.33	250	100	3	6	20.41	1641.52	131.32	163.40	8.92	394.48	78.90	86.00	4.37	1001.22	80.10
250x100x4	21.56	250	100	4	8	26.95	2155.26	172.42	215.53	8.88	512.98	102.60	112.93	4.33	1304.60	104.37
250x100x5	26.69	250	100	5	10	33.36	2652.83	212.23	266.50	8.83	625.33	125.07	139.00	4.29	1593.31	127.46
250x100x6	31.70	250	100	6	12	39.63	3134.57	250.77	316.33	8.79	731.75	146.35	164.23	4.25	1867.67	149.41
250x100x8	40.99	250	100	8	20	51.24	4051.80	324.14	412.62	8.71	927.56	185.51	212.22	4.17	2374.54	189.96
250x100x10	50.06	250	100	10	25	62.57	4909.50	392.76	504.50	8.62	1102.00	220.40	257.00	4.09	2827.64	226.21
250x150x4	24.76	250	150	4	8	30.95	2760.47	220.84	264.73	9.38	1256.95	167.59	186.33	6.33	2632.57	210.61

Other custom sizes are available upon request

RHS RECTANGULAR HOLLOW SECTIONS

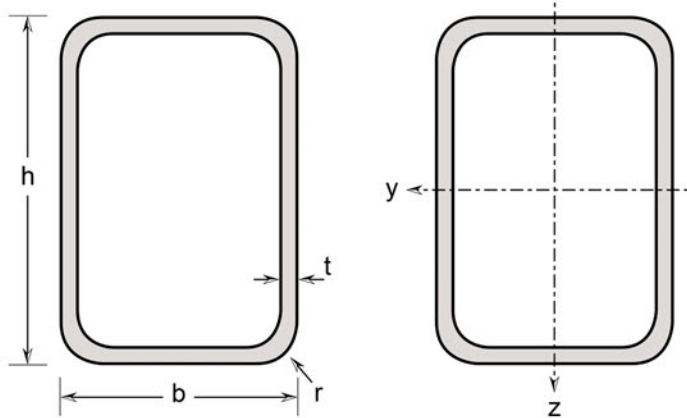

STAINLESS STEEL

Rectangular Hollow Sections Stainless steel


Cold formed and welded acc. to EN 10219-2; grade accord. to EN 10088. Surface condition: external weld bead removed, brushed / blasted and pickled



General Properties							Structural Properties									
Designation		Dimensions					Axis y-y				Axis z-z					
	G kg/m	h mm	b mm	t mm	r mm	A mm ² x10 ²	I _y mm ⁴ x10 ⁴	W _{ely} mm ³ x10 ³	W _{ply} mm ³ x10 ³	i _y mm x10	I _z mm ⁴ x10 ⁴	W _{elz} mm ³ x10 ³	W _{plz} mm ³ x10 ³	i _z mm x10	I _v mm ⁴ x10 ⁴	W _v mm ³ x10 ³
250x150x5	30.69	250	150	5	10	38.36	3403.25	272.26	327.75	9.34	1543.25	205.77	230.25	6.29	3235.96	258.88
250x150x6	36.50	250	150	6	12	45.63	4027.79	322.22	389.53	9.30	1818.91	242.52	273.13	6.25	3818.16	305.45
250x150x8	47.39	250	150	8	20	59.24	5223.51	417.88	509.42	9.22	2339.35	311.91	355.82	6.17	4920.35	393.63
250x150x10	58.06	250	150	10	25	72.57	6350.33	508.03	624.50	9.14	2820.33	376.04	434.50	6.09	5941.89	475.35
250x150x12	67.25	250	150	12	36	84.06	7410.92	592.87	734.86	9.06	3263.88	435.18	509.26	6.01	6885.50	550.84
300x100x4	24.76	300	100	4	8	30.95	3412.23	227.48	288.93	10.43	605.19	121.04	132.13	4.39	1647.90	109.86
300x100x5	30.69	300	100	5	10	38.36	4208.25	280.55	357.75	10.39	738.25	147.65	162.75	4.35	2013.85	134.26
300x100x6	36.50	300	100	6	12	45.63	4982.23	332.15	425.23	10.34	864.47	172.89	192.43	4.31	2362.11	157.47
300x100x8	47.39	300	100	8	20	59.24	6465.59	431.04	556.22	10.26	1097.27	219.45	249.02	4.23	3006.98	200.47
300x100x10	58.06	300	100	10	25	72.57	7865.33	524.36	682.00	10.17	1305.33	261.07	302.00	4.14	3585.32	239.02
300x150x4	27.96	300	150	4	8	34.95	4288.45	285.90	348.13	11.01	1470.17	196.02	215.53	6.45	3380.31	225.35
300x150x5	34.69	300	150	5	10	43.36	5296.17	353.08	431.50	10.97	1806.17	240.82	266.50	6.41	4158.41	277.23
300x150x6	41.30	300	150	6	12	51.63	6278.95	418.60	513.43	10.93	2130.13	284.02	316.33	6.37	4910.51	327.37
300x150x8	53.79	300	150	8	20	67.24	8171.29	544.75	673.02	10.85	2743.05	365.74	412.62	6.29	6338.30	422.55
300x150x10	66.06	300	150	10	25	82.57	9968.67	664.58	827.00	10.77	3311.17	441.49	504.50	6.20	7666.79	511.12
300x150x12	76.85	300	150	12	36	96.06	11674.20	778.28	975.46	10.69	3836.64	511.55	592.06	6.13	8899.07	593.27

Other custom sizes are available upon request

RHS RECTANGULAR HOLLOW SECTIONS

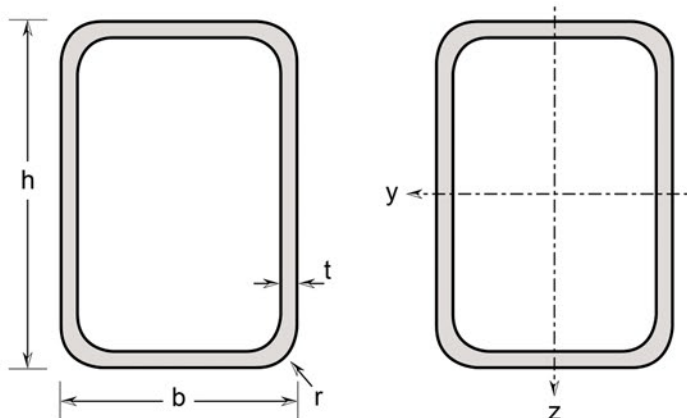

STAINLESS STEEL

Rectangular Hollow Sections Stainless steel


Cold formed and welded acc. to EN 10219-2; grade accord. to EN 10088. Surface condition: external weld bead removed, brushed / blasted and pickled



General Properties							Structural Properties									
Designation		Dimensions					Axis y-y				Axis z-z					
	G kg/m	h mm	b mm	t mm	r mm	A mm ² x10 ²	I _y mm ⁴ x10 ⁴	W _{ely} mm ³ x10 ³	W _{ply} mm ³ x10 ³	i _y mm x10	I _z mm ⁴ x10 ⁴	W _{elz} mm ³ x10 ³	W _{plz} mm ³ x10 ³	i _z mm x10	I _v mm ⁴ x10 ⁴	W _v mm ³ x10 ³
300x200x5	38.69	300	200	5	10	48.36	6384.08	425.61	505.25	11.41	3424.08	342.41	382.75	8.36	6753.32	450.22
300x200x6	46.10	300	200	6	12	57.63	7575.67	505.04	601.63	11.37	4052.79	405.28	455.23	8.32	7999.44	533.30
300x200x8	60.19	300	200	8	20	75.24	9877.00	658.47	789.82	11.29	5256.84	525.68	596.22	8.24	10390.65	692.71
300x200x10	74.06	300	200	10	25	92.57	12072.00	804.80	972.00	11.21	6392.00	639.20	732.00	8.16	12650.04	843.34
300x200x12	86.45	300	200	12	36	108.06	14163.96	944.26	1148.26	11.13	7460.92	746.09	862.66	8.08	14781.04	985.40
350x150x6	46.10	350	150	6	12	57.63	9187.11	524.98	652.33	12.53	2441.35	325.51	359.53	6.46	6033.97	344.80
350x150x8	60.19	350	150	8	20	75.24	11987.08	684.98	856.62	12.44	3146.76	419.57	469.42	6.37	7796.57	445.52
350x150x10	74.06	350	150	10	25	92.57	14662.00	837.83	1054.50	12.36	3802.00	506.93	574.50	6.29	9440.67	539.47
350x150x12	86.45	350	150	12	36	108.06	17215.48	983.74	1246.06	12.28	4409.40	587.92	674.86	6.21	10969.73	626.84
350x250x6	55.70	350	250	6	12	69.63	12737.55	727.86	858.73	13.44	7600.67	608.05	682.33	10.38	14378.07	821.60
350x250x8	72.99	350	250	8	20	91.24	16666.49	952.37	1130.22	13.36	9910.33	792.83	896.62	10.30	18766.79	1072.39
350x250x10	90.06	350	250	10	25	112.57	20443.67	1168.21	1394.50	13.28	12113.67	969.09	1104.50	10.22	22960.55	1312.03
350x250x12	105.65	350	250	12	36	132.06	24073.00	1375.60	1651.66	13.20	14213.96	1137.12	1306.06	10.14	26963.49	1540.77
400x200x5	46.69	400	200	5	10	58.36	12744.92	637.25	775.25	14.70	4374.92	437.49	480.25	8.61	10055.68	502.78
400x200x6	55.70	400	200	6	12	69.63	15155.99	757.80	924.43	14.66	5182.23	518.22	571.63	8.57	11923.39	596.17

Other custom sizes are available upon request

RHS RECTANGULAR HOLLOW SECTIONS

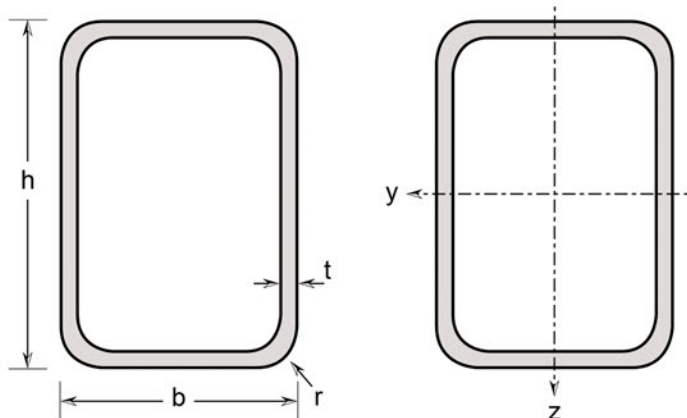

STAINLESS STEEL

Rectangular Hollow Sections Stainless steel

Cold formed and welded acc. to EN 10219-2; grade accord. to EN 10088. Surface condition: external weld bead removed, brushed / blasted and pickled



General Properties							Structural Properties									
Designation		Dimensions					Axis y-y				Axis z-z					
	G kg/m	h mm	b mm	t mm	r mm	A mm ² x10 ²	I _y mm ⁴ x10 ⁴	W _{ely} mm ³ x10 ³	W _{ply} mm ³ x10 ³	i _y mm x10	I _z mm ⁴ x10 ⁴	W _{elz} mm ³ x10 ³	W _{plz} mm ³ x10 ³	i _z mm x10	I _v mm ⁴ x10 ⁴	W _v mm ³ x10 ³
400x200x8	72.99	400	200	8	20	91.24	19844.57	992.23	1217.02	14.57	6732.25	673.23	749.82	8.49	15519.64	775.98
400x200x10	90.06	400	200	10	25	112.57	24358.67	1217.93	1502.00	14.49	8198.67	819.87	922.00	8.41	18933.83	946.69
400x200x12	105.65	400	200	12	36	132.06	28702.52	1435.13	1779.46	14.41	9584.44	958.44	1088.26	8.33	22170.11	1108.51
400x300x8	85.79	400	300	8	20	107.24	25991.99	1299.60	1530.62	15.41	16699.83	1113.32	1257.02	12.35	30647.97	1532.40
400x300x10	106.06	400	300	10	25	132.57	31965.33	1598.27	1892.00	15.33	20485.33	1365.69	1552.00	12.27	37622.38	1881.12
400x300x12	124.85	400	300	12	36	156.06	37738.04	1886.90	2245.06	15.25	24123.00	1608.20	1839.46	12.19	44331.56	2216.58
500x200x8	85.79	500	200	8	20	107.24	34484.15	1379.37	1724.22	17.75	8207.67	820.77	903.42	8.66	20873.56	834.94
500x200x10	106.06	500	200	10	25	132.57	42445.33	1697.81	2132.00	17.67	10005.33	1000.53	1112.00	8.58	25492.97	1019.72
500x200x12	124.85	500	200	12	36	156.06	50153.08	2006.12	2530.66	17.58	11707.96	1170.80	1313.86	8.49	29882.70	1195.31
500x300x8	98.59	500	300	8	20	123.24	44167.56	1766.70	2117.82	18.76	20111.24	1340.75	1490.62	12.66	42121.11	1684.84
500x300x10	122.06	500	300	10	25	152.57	54452.00	2178.08	2622.00	18.68	24692.00	1646.13	1842.00	12.58	51775.41	2071.02
500x300x12	144.05	500	300	12	36	180.06	64444.60	2577.78	3116.26	18.60	29102.52	1940.17	2185.06	12.50	61090.56	2443.62

Other custom sizes are available upon request