



STAINLESS STEEL

UB British Universal Beams

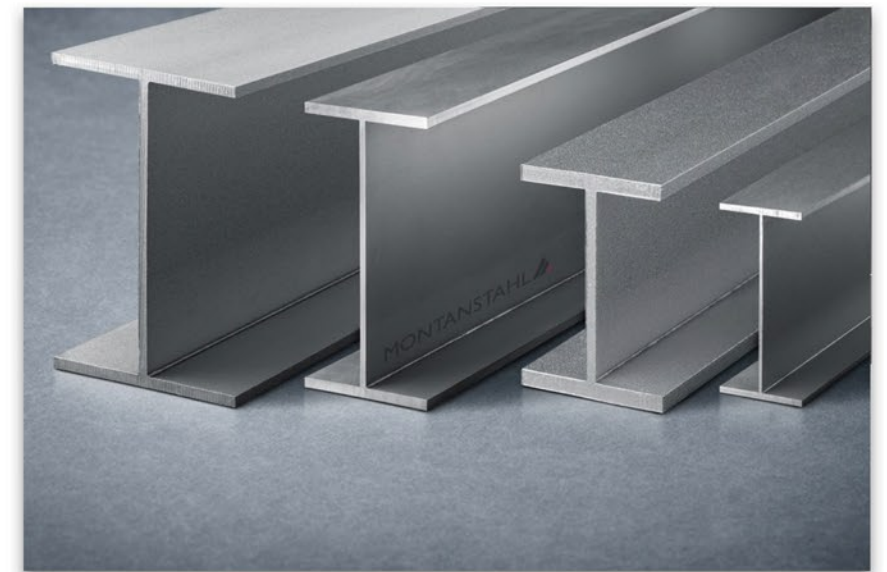

LASER WELDED PROFILES


UB BRITISH UNIVERSAL BEAMS

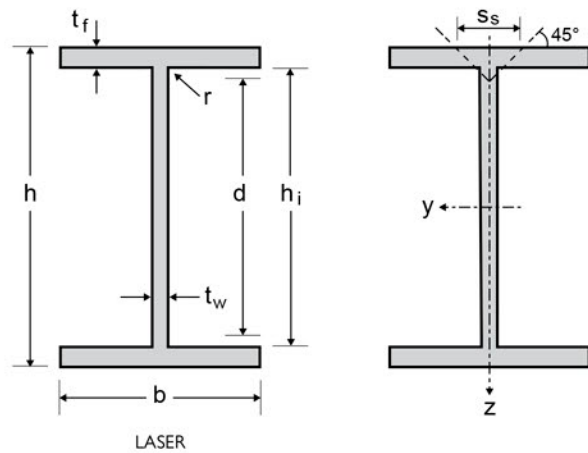

STAINLESS STEEL

Product Description

Dimensions: in accordance with EN 10365
Tolerances: EN 10034: 1993
Grade according to EN 10088-3: 1D
Surface condition: blasted and pickled

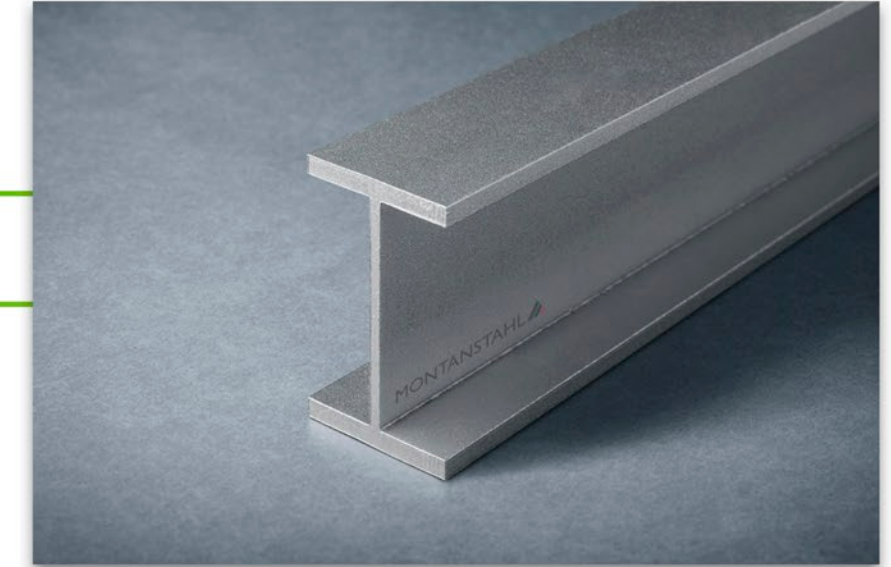


General properties									Structural properties											
Designation		Dimensions					Dimensions for detailing		Strong axis y-y					Weak axis z-z						
	G kg/m	h mm	b mm	t _w mm	t _f mm	A mm ² x10 ²	h _i mm	d* mm	I _y mm ⁴ x10 ⁴	W _{el.y} mm ³ x10 ³	W _{pl.y} mm ³ x10 ³	i _y mm x10	A _{vz} mm ² x10 ²	I _z mm ⁴ x10 ⁴	W _{el.z} mm ³ x10 ³	W _{pl.z} mm ³ x10 ³	i _z mm x10	S _s mm	I _t mm ⁴ x10 ⁴	I _w mm ⁶ x10 ⁹
UB 127 x 76 x 13	12.8	127.0	76.0	4.0	7.6	16.06	111.8	107.8	459.92	72.43	81.66	5.35	5.11	55.67	14.65	22.40	1.86	21.54	2.44	1.98
UB 152 x 89 x 16	15.9	152.4	88.7	4.5	7.7	19.86	137.0	133.0	813.72	106.79	120.18	6.40	6.85	89.67	20.22	30.99	2.12	22.24	3.11	4.69
UB 178 x 102 x 19	19.0	177.8	101.2	4.8	7.9	23.80	162.0	158.0	1327.01	149.27	167.60	7.47	8.51	136.62	27.00	41.40	2.40	22.94	3.93	9.85
UB 203 x 102 x 23	23.2	203.2	101.8	5.4	9.3	28.94	184.6	180.6	2067.08	203.45	229.89	8.45	10.88	163.77	32.17	49.55	2.38	26.34	6.39	15.37
UB 203 x 133 x 25	25.2	203.2	133.2	5.7	7.8	31.51	187.6	183.6	2301.09	226.49	253.48	8.55	11.48	307.52	46.17	70.73	3.12	23.64	5.45	29.33
UB 203 x 133 x 30	30.2	206.8	133.9	6.4	9.6	37.75	187.6	183.6	2856.49	276.26	310.12	8.70	13.04	384.53	57.44	87.99	3.19	27.94	9.58	37.34
UB 254 x 102 x 22	22.0	254.0	101.6	5.7	6.8	27.55	240.4	236.4	2776.30	218.61	253.55	10.04	14.40	119.24	23.47	37.06	2.08	21.64	3.71	18.16
UB 254 x 102 x 25	25.3	257.2	101.9	6.0	8.4	31.58	240.4	236.4	3349.85	260.49	300.06	10.30	15.30	148.57	29.16	45.79	2.17	25.14	5.83	22.92
UB 254 x 102 x 28	28.5	260.4	102.2	6.3	10.0	35.62	240.4	236.4	3940.00	302.61	347.34	10.52	16.21	178.42	34.92	54.62	2.24	28.64	8.81	27.89
UB 254 x 146 x 31	31.4	251.4	146.1	6.0	8.6	39.22	234.2	230.2	4352.04	346.22	387.74	10.53	14.95	447.42	61.25	93.90	3.38	25.54	7.95	65.88
UB 254 x 146 x 37	37.4	256.0	146.4	6.3	10.9	46.70	234.2	230.2	5475.42	427.77	477.91	10.83	15.91	570.52	77.94	119.15	3.50	30.44	14.49	85.61
UB 254 x 146 x 43	43.4	259.6	147.3	7.2	12.7	54.31	234.2	230.2	6482.34	499.41	561.01	10.93	18.32	677.22	91.95	140.83	3.53	34.94	22.76	103.10
UB 305 x 102 x 25	24.9	305.1	101.6	5.8	7.0	31.14	291.1	287.1	4360.07	285.81	335.38	11.83	17.60	122.83	24.18	38.59	1.99	22.14	4.32	27.18
UB 305 x 102 x 28	28.3	308.7	101.8	6.0	8.8	35.42	291.1	287.1	5270.36	341.46	396.27	12.20	18.38	155.26	30.50	48.23	2.09	25.94	6.77	34.79
UB 305 x 102 x 33	33.1	312.7	102.4	6.6	10.8	41.37	291.1	287.1	6405.97	409.72	474.20	12.44	20.39	193.98	37.89	59.81	2.17	30.54	11.34	44.04
UB 305 x 127 x 37	37.2	304.4	123.4	7.1	10.7	46.53	283.0	279.0	7045.15	462.89	530.44	12.30	21.32	335.95	54.45	85.05	2.69	30.84	13.49	72.26
UB 305 x 127 x 42	42.2	307.2	124.3	8.0	12.1	52.75	283.0	279.0	8070.36	525.41	604.50	12.37	24.13	388.51	62.51	98.02	2.71	34.54	19.51	84.32
UB 305 x 127 x 48	48.5	311.0	125.3	9.0	14.0	60.59	283.0	279.0	9449.26	607.67	701.68	12.49	27.32	460.75	73.54	115.65	2.76	39.34	29.65	101.22
UB 305 x 165 x 40	40.5	303.4	165.0	6.0	10.2	50.67	283.0	279.0	8377.07	552.21	614.07	12.86	18.03	764.17	92.63	141.41	3.88	28.74	13.65	164.12
UB 305 x 165 x 46	46.5	306.6	165.7	6.7	11.8	58.10	283.0	279.0	9773.14	637.52	711.04	12.97	20.26	895.46	108.08	165.18	3.93	32.64	20.80	194.40
UB 305 x 165 x 54	54.5	310.4	166.9	7.9	13.7	68.12	283.0	279.0	11570.37	745.51	837.07	13.03	24.02	1062.71	127.35	195.24	3.95	37.64	32.90	233.62

Other custom sizes are available upon request

* This dimension is related to the internal radius, achieved by the various producer. At Millstock Stainless beams are produced with radius of ≤2mm.


UB BRITISH UNIVERSAL BEAMS

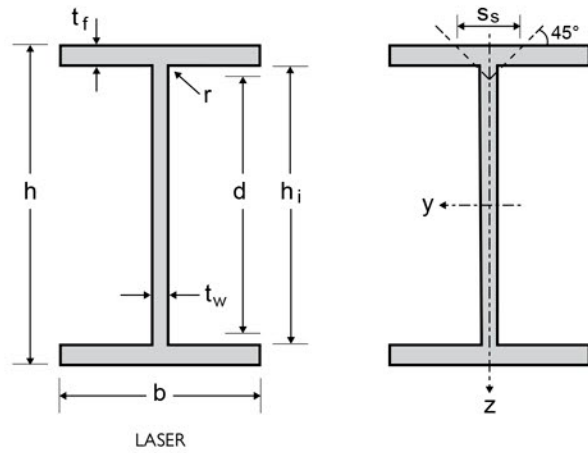

STAINLESS STEEL

Product Description

Dimensions: in accordance with EN 10365
Tolerances: EN 10034: 1993
Grade according to EN 10088-3: 1D
Surface condition: blasted and pickled

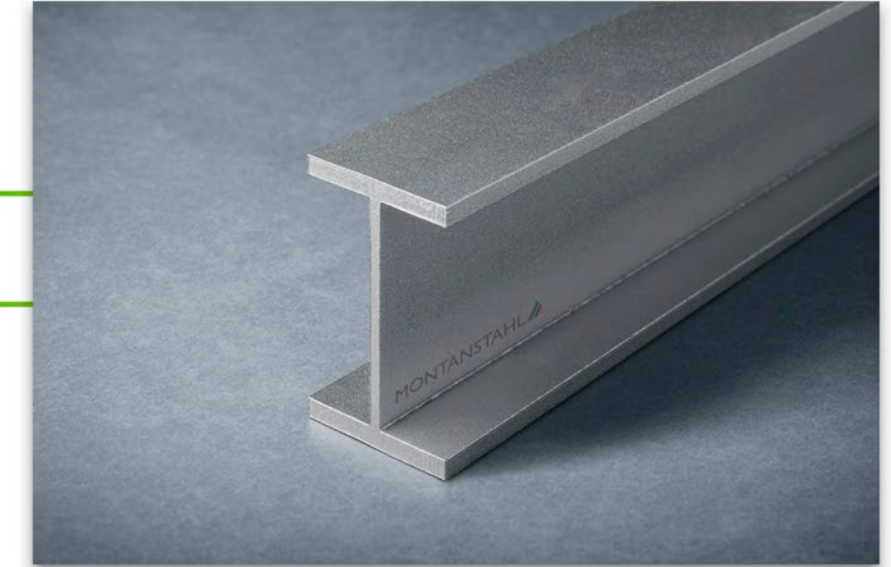


General properties									Structural properties											
Designation		Dimensions					Dimensions for detailing		Strong axis y-y					Weak axis z-z						
	G kg/m	h mm	b mm	t _w mm	t _f mm	A mm ² x10 ²	h _i mm	d* mm	I _y mm ⁴ x10 ⁴	W _{el.y} mm ³ x10 ³	W _{pl.y} mm ³ x10 ³	i _y mm x10	A _{vz} mm ² x10 ²	I _z mm ⁴ x10 ⁴	W _{el.z} mm ³ x10 ³	W _{pl.z} mm ³ x10 ³	i _z mm x10	S _s mm	I _t mm ⁴ x10 ⁴	I _w mm ⁶ x10 ⁹
UB 356 x 127 x 33	33.0	349.0	125.4	6.0	8.5	41.27	332.0	328.0	8019.45	459.57	528.84	13.94	20.80	279.96	44.65	69.83	2.60	25.34	7.59	80.97
UB 356 x 127 x 39	39.1	353.4	126.0	6.6	10.7	48.91	332.0	328.0	9941.53	562.62	644.47	14.26	23.08	357.53	56.75	88.56	2.70	30.34	13.43	104.74
UB 356 x 171 x 45	45.2	351.4	171.1	7.0	9.7	56.47	332.0	328.0	11835.75	673.63	760.57	14.48	24.34	810.74	94.77	146.07	3.79	28.74	14.32	236.37
UB 356 x 171 x 51	51.2	355.0	171.5	7.4	11.5	64.05	332.0	328.0	13905.92	783.43	881.95	14.73	25.91	967.93	112.88	173.68	3.89	32.74	21.85	285.19
UB 356 x 171 x 57	57.4	358.0	172.2	8.1	13.0	71.70	332.0	328.0	15808.31	883.15	996.09	14.85	28.50	1107.82	128.67	198.20	3.93	36.44	30.96	329.21
UB 356 x 171 x 67	67.7	363.4	173.2	9.1	15.7	84.63	332.0	328.0	19232.82	1058.49	1196.81	15.07	32.30	1361.63	157.23	242.38	4.01	42.84	52.34	410.91
UB 406 x 140 x 39	39.0	398.0	141.8	6.4	8.6	48.80	380.8	376.8	12204.55	613.29	707.53	15.82	25.30	409.51	57.76	90.37	2.90	25.94	9.44	154.92
UB 406 x 140 x 46	46.2	403.2	142.2	6.8	11.2	57.78	380.8	376.8	15381.38	762.97	871.48	16.32	27.14	537.74	75.63	117.65	3.05	31.54	17.23	206.19
UB 406 x 178 x 54	54.5	402.6	177.7	7.7	10.9	68.09	380.8	376.8	18418.51	914.98	1038.49	16.45	30.63	1020.84	114.89	177.76	3.87	31.84	21.24	391.01
UB 406 x 178 x 60	60.5	406.4	177.9	7.9	12.8	75.66	380.8	376.8	21292.56	1047.86	1183.32	16.78	31.64	1202.69	135.21	208.51	3.99	35.84	30.98	465.20
UB 406 x 178 x 67	67.7	409.4	178.8	8.8	14.3	84.68	380.8	376.8	24027.17	1173.77	1329.88	16.84	35.38	1364.52	152.63	235.97	4.01	39.74	43.21	531.67
UB 406 x 178 x 74	74.9	412.8	179.5	9.5	16.0	93.65	380.8	376.8	27006.03	1308.43	1484.66	16.98	38.37	1545.01	172.15	266.37	4.06	43.84	59.23	607.08
UB 457 x 152 x 52	52.6	449.8	152.4	7.6	10.9	65.79	428.0	424.0	20984.19	933.05	1077.87	17.86	33.83	644.60	84.59	132.78	3.13	31.74	19.51	309.67
UB 457 x 152 x 60	60.3	454.6	152.9	8.1	13.3	75.37	428.0	424.0	25115.29	1104.94	1269.10	18.25	36.31	794.26	103.89	162.50	3.25	37.04	31.35	385.77
UB 457 x 152 x 67	67.8	458.0	153.8	9.0	15.0	84.69	428.0	424.0	28541.84	1246.37	1434.90	18.36	40.50	912.12	118.61	186.09	3.28	41.34	44.55	446.23
UB 457 x 152 x 74	74.9	462.0	154.4	9.6	17.0	93.62	428.0	424.0	32289.32	1397.81	1608.41	18.57	43.43	1046.06	135.50	212.51	3.34	45.94	62.09	516.30
UB 457 x 152 x 82	82.9	465.8	155.3	10.5	18.9	103.68	428.0	424.0	36203.93	1554.48	1793.32	18.69	47.71	1183.98	152.48	239.73	3.38	50.64	84.54	589.10
UB 457 x 191 x 67	67.7	453.4	189.9	8.5	12.7	84.65	428.0	424.0	28995.56	1279.03	1452.85	18.51	38.00	1451.73	152.89	236.74	4.14	36.24	34.70	703.81
UB 457 x 191 x 74	75.0	457.0	190.4	9.0	14.5	93.77	428.0	424.0	32934.64	1441.34	1634.55	18.74	40.44	1670.69	175.49	271.51	4.22	40.34	48.81	816.55
UB 457 x 191 x 82	82.9	460.0	191.3	9.9	16.0	103.62	428.0	424.0	36666.64	1594.20	1813.11	18.81	44.63	1870.34	195.54	303.27	4.25	44.24	65.57	920.07
UB 457 x 191 x 89	90.3	463.4	191.9	10.5	17.7	112.91	428.0	424.0	40630.41	1753.58	1995.47	18.97	47.54	2088.86	217.70	337.72	4.30	48.24	86.38	1035.31
UB 457 x 191 x 98	99.5	467.2	192.8	11.4	19.6	124.40	428.0	424.0	45342.25	1941.02	2214.23	19.09	51.84	2346.43	243.41	378.21	4.34	52.94	116.03	1172.59

Other custom sizes are available upon request

* This dimension is related to the internal radius, achieved by the various producer. At Millstock Stainless beams are produced with radius of ≤2mm.


UB BRITISH UNIVERSAL BEAMS

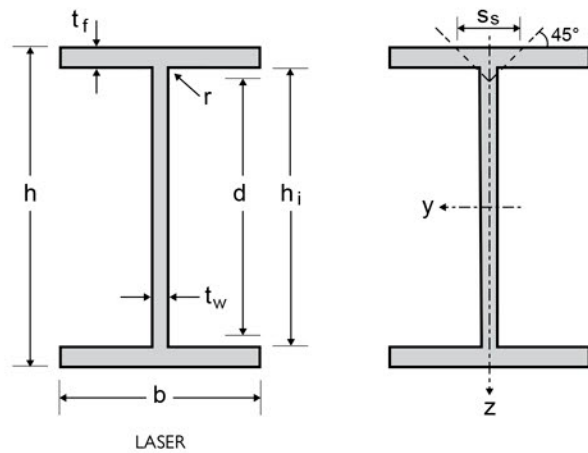

STAINLESS STEEL

Product Description

Dimensions: in accordance with EN 10365
Tolerances: EN 10034: 1993
Grade according to EN 10088-3: 1D
Surface condition: blasted and pickled

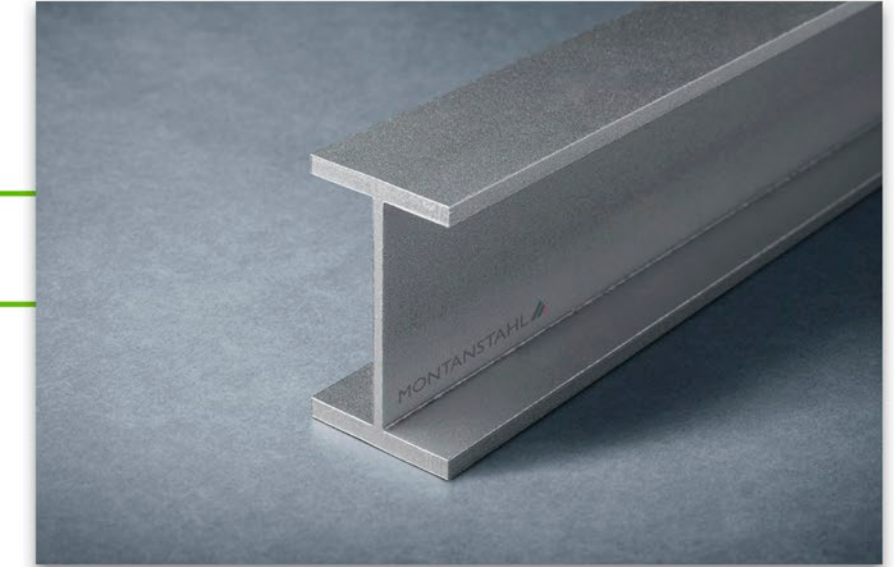


General properties									Structural properties											
Designation		Dimensions					Dimensions for detailing		Strong axis y-y					Weak axis z-z						
	G kg/m	h mm	b mm	t _w mm	t _f mm	A mm ² x10 ²	h _i mm	d* mm	I _y mm ⁴ x10 ⁴	W _{el.y} mm ³ x10 ³	W _{pl.y} mm ³ x10 ³	i _y mm x10	A _{vz} mm ² x10 ²	I _z mm ⁴ x10 ⁴	W _{el.z} mm ³ x10 ³	W _{pl.z} mm ³ x10 ³	i _z mm x10	S _s mm	I _t mm ⁴ x10 ⁴	I _w mm ⁶ x10 ⁹
UB 533 x 210 x 82	82.7	528.3	208.8	9.6	13.2	103.34	501.9	497.9	46708.31	1768.25	2025.13	21.26	50.01	2006.40	192.18	299.32	4.41	38.34	47.03	1328.43
UB 533 x 210 x 92	92.8	533.1	209.3	10.1	15.6	116.03	501.9	497.9	54396.46	2040.76	2326.60	21.65	52.93	2388.18	228.21	354.51	4.54	43.64	69.93	1596.03
UB 533 x 210 x 101	101.9	536.7	210.0	10.8	17.4	127.32	501.9	497.9	60687.89	2261.52	2578.52	21.83	56.81	2690.97	256.28	398.33	4.60	47.94	94.06	1810.64
UB 533 x 210 x 109	110.0	539.5	210.8	11.6	18.8	137.52	501.9	497.9	65991.15	2446.38	2794.94	21.91	61.19	2941.61	279.09	434.61	4.63	51.54	118.33	1989.45
UB 533 x 210 x 122	123.2	544.5	211.9	12.7	21.3	154.05	501.9	497.9	75211.70	2762.60	3162.10	22.10	67.33	3386.28	319.61	498.46	4.69	57.64	168.30	2311.51
UB 610 x 229 x 101	102.1	602.6	227.6	10.5	14.8	127.57	573.0	569.0	74693.97	2479.06	2842.84	24.20	62.35	2913.76	256.04	399.15	4.78	42.44	71.44	2512.04
UB 610 x 229 x 113	114.1	607.6	228.2	11.1	17.3	142.59	573.0	569.0	86232.45	2838.46	3242.52	24.59	66.25	3432.97	300.87	468.12	4.91	48.04	104.33	2984.88
UB 610 x 229 x 125	126.4	612.2	229.0	11.9	19.6	157.99	573.0	569.0	97523.95	3186.02	3637.59	24.85	71.34	3931.00	343.32	534.23	4.99	53.44	145.58	3444.09
UB 610 x 229 x 140	141.5	617.2	230.2	13.1	22.1	176.85	573.0	569.0	110691.28	3586.89	4103.78	25.02	78.88	4503.96	391.31	610.17	5.05	59.64	205.59	3978.11
UB 610 x 305 x 149	150.2	612.4	304.8	11.8	19.7	187.74	573.0	569.0	124034.71	4050.77	4528.46	25.70	70.76	9305.22	610.58	935.06	7.04	53.54	185.03	8165.25
UB 610 x 305 x 179	180.6	620.2	307.1	14.1	23.6	225.78	573.0	569.0	151182.71	4875.29	5482.24	25.88	85.10	11405.41	742.78	1141.37	7.11	63.64	318.76	10136.94
UB 610 x 305 x 238	240.8	635.8	311.4	18.4	31.4	301.03	573.0	569.0	207629.89	6531.30	7421.09	26.26	112.50	15832.58	1016.86	1570.96	7.25	83.54	747.32	14431.89
UB 686 x 254 x 125	126.0	677.9	253.0	11.7	16.2	157.53	645.5	641.5	116005.22	3422.49	3931.91	27.14	78.10	4381.08	346.33	540.59	5.27	46.44	106.40	4786.16
UB 686 x 254 x 140	141.2	683.5	253.7	12.4	19.0	176.48	645.5	641.5	134279.91	3929.19	4495.87	27.58	83.19	5181.14	408.45	636.29	5.42	52.74	156.25	5708.13
UB 686 x 254 x 152	153.7	687.5	254.5	13.2	21.0	192.13	645.5	641.5	148367.91	4316.16	4938.23	27.79	88.85	5781.80	454.37	708.23	5.49	57.54	204.85	6407.25
UB 686 x 254 x 170	171.9	692.9	255.8	14.5	23.7	214.88	645.5	641.5	168338.99	4858.97	5568.53	27.99	98.02	6627.90	518.21	809.34	5.55	64.24	289.03	7402.03
UB 762 x 267 x 134	134.6	750.0	264.4	12.0	15.5	168.28	719.0	715.0	147777.12	3940.72	4562.24	29.63	88.79	4785.27	361.97	567.69	5.33	45.34	107.67	6440.04
UB 762 x 267 x 147	147.9	754.0	265.2	12.8	17.5	184.89	719.0	715.0	165586.82	4392.22	5073.60	29.93	95.01	5452.69	411.21	644.87	5.43	50.14	145.34	7377.22
UB 762 x 267 x 173	174.5	762.2	266.7	14.3	21.6	218.07	719.0	715.0	202367.10	5310.08	6115.76	30.46	106.80	6846.77	513.44	804.98	5.60	59.84	247.94	9364.38
UB 762 x 267 x 197	198.7	769.8	268.0	15.6	25.4	248.34	719.0	715.0	237041.96	6158.53	7084.66	30.89	117.18	8171.44	609.81	955.94	5.74	68.74	378.97	11288.59
UB 838 x 292 x 176	177.1	834.9	291.7	14.0	18.8	221.34	797.3	793.3	241838.46	5793.23	6701.73	33.05	115.04	7795.32	534.48	838.93	5.93	53.94	202.68	12949.19
UB 838 x 292 x 194	195.3	840.7	292.4	14.7	21.7	244.14	797.3	793.3	274992.95	6542.00	7534.14	33.56	121.30	9062.63	619.88	970.75	6.09	60.44	282.59	15161.72
UB 838 x 292 x 226	228.7	850.9	293.8	16.1	26.8	285.88	797.3	793.3	335521.16	7886.27	9048.84	34.26	133.79	11355.38	773.00	1208.36	6.30	72.04	481.26	19232.63

Other custom sizes are available upon request

* This dimension is related to the internal radius, achieved by the various producer. At Millstock Stainless beams are produced with radius of ≤2mm.


UB BRITISH UNIVERSAL BEAMS

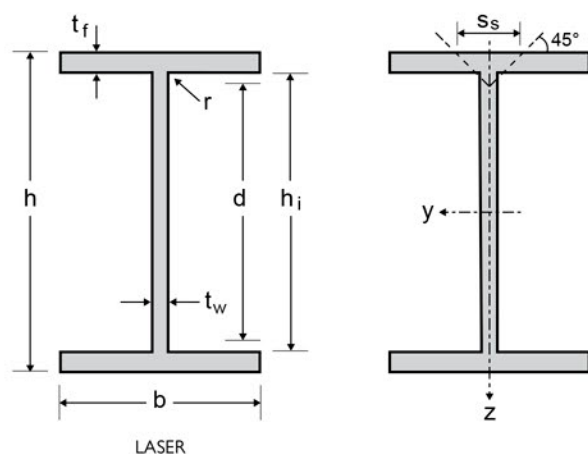

STAINLESS STEEL

Product Description

Dimensions: in accordance with EN 10365
Tolerances: EN 10034: 1993
Grade according to EN 10088-3: 1D
Surface condition: blasted and pickled

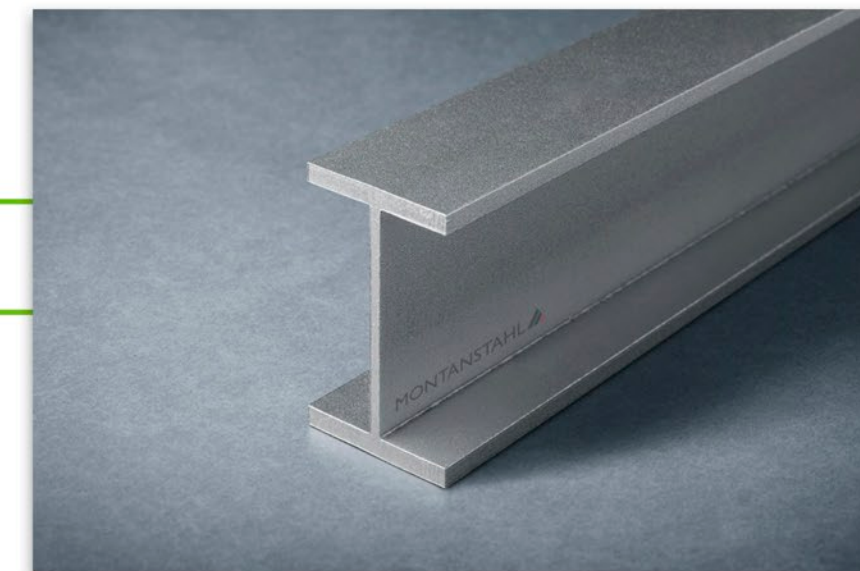

General properties									Structural properties											
Designation		Dimensions					Dimensions for detailing		Strong axis y-y					Weak axis z-z						
	G kg/m	h mm	b mm	t _w mm	t _f mm	A mm ² x10 ²	h _i mm	d* mm	I _y mm ⁴ x10 ⁴	W _{el,y} mm ³ x10 ³	W _{pl,y} mm ³ x10 ³	i _y mm x10	A _{vz} mm ² x10 ²	I _z mm ⁴ x10 ⁴	W _{el,z} mm ³ x10 ³	W _{pl,z} mm ³ x10 ³	i _z mm x10	S _s mm	I _t mm ⁴ x10 ⁴	I _w mm ⁶ x10 ⁹
UB 914 x 305 x 201	202.3	903.0	303.3	15.1	20.2	252.82	862.6	858.6	319606.85	7078.78	8218.99	35.56	134.15	9418.05	621.04	978.31	6.10	57.84	266.31	18301.30
UB 914 x 305 x 224	226.0	910.4	304.1	15.9	23.9	282.55	862.6	858.6	370766.26	8145.13	9402.27	36.22	141.94	11230.93	738.63	1159.65	6.30	66.04	390.23	22008.65
UB 914 x 305 x 238	240.4	915.0	305.0	16.5	25.9	300.45	863.2	859.2	400817.02	8761.03	10098.52	36.52	147.77	12279.86	805.24	1263.46	6.39	70.64	478.19	24204.12
UB 914 x 305 x 253	255.8	918.4	305.5	17.3	27.9	319.73	862.6	858.6	430657.23	9378.42	10809.75	36.70	155.21	13295.51	870.41	1366.53	6.45	75.44	584.22	26284.18
UB 914 x 305 x 271	274.4	923.0	307.0	18.4	30.0	343.03	863.0	859.0	465980.01	10097.08	11651.95	36.86	165.55	14512.05	945.41	1486.81	6.50	80.74	721.75	28842.18
UB 914 x 305 x 289	292.1	926.6	307.7	19.5	32.0	365.17	862.6	858.6	498539.37	10760.62	12437.45	36.95	175.76	15590.84	1013.38	1596.90	6.53	85.84	871.74	31087.01
UB 914 x 305 x 313	316.3	932.0	309.0	21.1	34.5	395.34	863.0	859.0	542644.60	11644.73	13497.94	37.05	190.79	17032.19	1102.41	1743.14	6.56	92.44	1097.55	34162.70
UB 914 x 305 x 345	349.3	943.0	308.0	22.1	39.9	436.59	863.2	859.2	619989.89	13149.31	15216.61	37.68	201.22	19507.73	1266.74	1997.98	6.68	104.24	1569.47	39617.36
UB 914 x 305 x 381	386.3	951.0	310.0	24.4	43.9	482.84	863.2	859.2	691176.37	14535.78	16891.40	37.84	223.12	21901.63	1413.01	2237.92	6.74	114.54	2099.54	44838.25
UB 914 x 305 x 425	431.1	961.0	313.0	26.9	49.0	538.92	863.0	859.0	782580.33	16286.79	18997.40	38.11	247.32	25182.56	1609.11	2556.41	6.84	127.24	2906.90	52072.39
UB 914 x 305 x 474	480.6	971.0	316.0	30.0	54.1	600.79	862.8	858.8	880088.26	18127.46	21259.61	38.27	277.27	28645.85	1813.03	2895.29	6.91	140.54	3953.28	59798.63
UB 914 x 305 x 521	528.5	981.0	319.0	33.0	58.9	660.67	863.2	859.2	976814.35	19914.67	23474.10	38.45	306.68	32125.23	2014.12	3231.93	6.97	153.14	5159.07	67737.97
UB 914 x 305 x 576	584.1	993.0	322.0	36.1	65.0	730.18	863.0	859.0	1096122.98	22077.00	26146.06	38.74	337.64	36506.89	2267.51	3650.96	7.07	168.44	6912.80	77869.19
UB 914 x 419 x 343	345.9	911.8	418.5	19.4	32.0	432.35	847.8	843.8	617107.32	13536.02	15269.75	37.78	172.00	39143.37	1870.65	2882.08	9.52	85.74	1106.66	75647.23
UB 914 x 419 x 388	391.4	921.0	420.5	21.4	36.6	489.27	847.8	843.8	710962.39	15438.92	17458.03	38.12	190.76	45424.56	2160.50	3332.91	9.64	96.94	1623.69	88688.09
UB 1016 x 305 x 222	220.1	970.0	300.0	16.0	21.1	275.08	927.8	923.8	391589.16	8074.00	9451.38	37.73	152.70	9526.69	635.11	1008.91	5.88	60.54	315.50	21373.51
UB 1016 x 305 x 249	247.3	980.0	300.0	16.5	26.0	309.15	928.0	924.0	464993.98	9489.67	10995.18	38.78	158.48	11734.77	782.32	1233.19	6.16	70.84	485.96	26620.89
UB 1016 x 305 x 272	271.3	990.0	300.0	16.5	31.0	339.15	928.0	924.0	537761.48	10863.87	12472.68	39.82	159.51	13984.77	932.32	1458.19	6.42	80.84	717.54	32073.87
UB 1016 x 305 x 314	314.2	1000.0	300.0	19.1	35.9	392.72	928.2	924.2	628119.76	12562.40	14498.88	39.99	185.61	16208.93	1080.60	1700.19	6.42	93.24	1109.19	37539.73
UB 1016 x 305 x 350	350.0	1008.0	302.0	21.1	40.0	437.44	928.0	924.0	706880.68	14025.41	16237.78	40.20	205.88	18435.09	1220.87	1927.41	6.49	103.44	1528.68	43015.04
UB 1016 x 305 x 393	394.0	1016.0	303.0	24.4	43.9	492.55	928.2	924.2	791596.80	15582.61	18187.66	40.09	238.98	20466.02	1350.89	2153.40	6.45	114.54	2091.54	48084.27
UB 1016 x 305 x 415	416.8	1020.0	304.0	26.0	46.0	520.99	928.0	924.0	837036.61	16412.48	19219.70	40.08	255.11	21675.07	1425.99	2282.45	6.45	120.34	2438.11	51084.04
UB 1016 x 305 x 438	438.9	1026.0	305.0	26.9	49.0	548.57	928.0	924.0	893092.86	17409.22	20394.32	40.35	264.81	23321.57	1529.28	2447.04	6.52	127.24	2886.33	55293.42
UB 1016 x 305 x 494	497.1	1036.0	309.0	31.0	54.0	621.43	928.0	924.0	1011874.75	19534.26	23061.42	40.35	306.61	26783.74	1733.58	2800.99	6.57	141.34	4019.01	64014.88
UB 1016 x 305 x 584	588.8	1056.0	314.0	36.0	64.0	736.03	928.0	924.0	1229986.80	23295.20	27687.48	40.88	359.71	33384.01	2126.37	3455.81	6.73	166.34	6623.55	81242.08

Other custom sizes are available upon request

* This dimension is related to the internal radius, achieved by the various producer. At Millstock Stainless beams are produced with radius of ≤2mm.